


# Seat ventilation blower

## DRF-29A306 XL

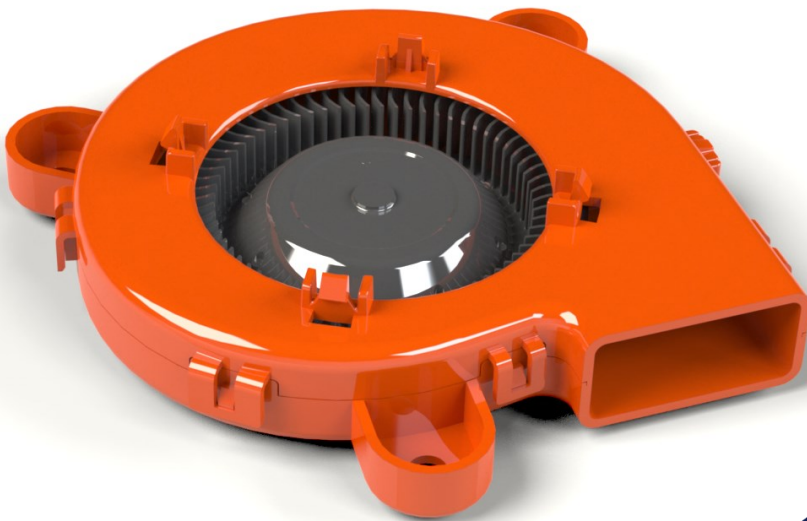


**Size 120 x 120 x 22 mm**


## Motor Specification

Type of motor	-	DC Brushless
Weight	g	149
Size	mm	120 x 120
Thickness at housing scroll	mm	22
Motor output	W	4.7
Maximum current	A	1.0
Operating voltage range	V	9 to 16
Operating temperature	°C	-40 to 80
Storage temperature	°C	-40 to 85
Operating relative humidity	%	95
Maximum pressure	Pa	568
Maximum flow	CFM	25
Speed	RPM	4,160
Noise	dB(A)	55
Bearing type	-	Sleeve
IP rating	-	IP52
Housing material	-	Plastic
Impeller material	-	Plastic
Interface	-	Power, Ground, Speed control (PWM or Analog)


## P-Q Performance Curve

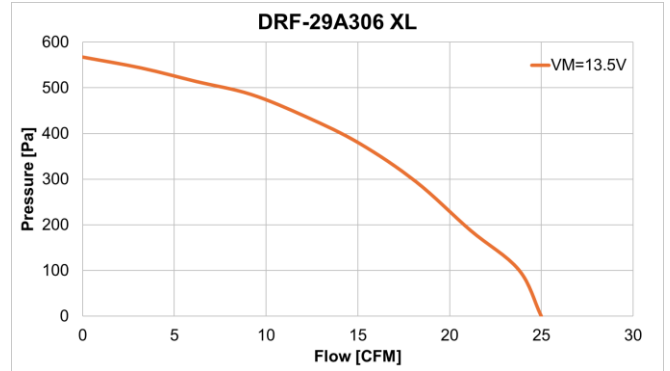

## Noise Performance Curve

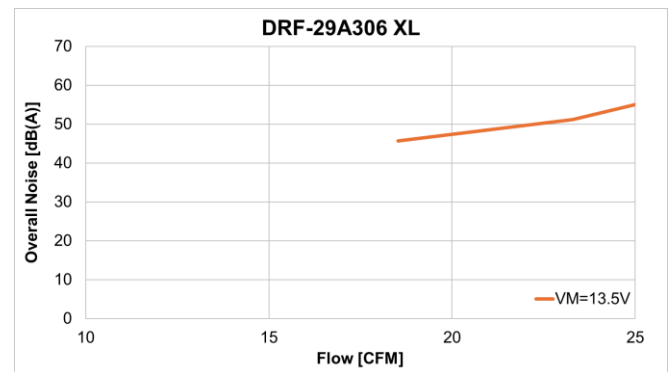

## Dimension

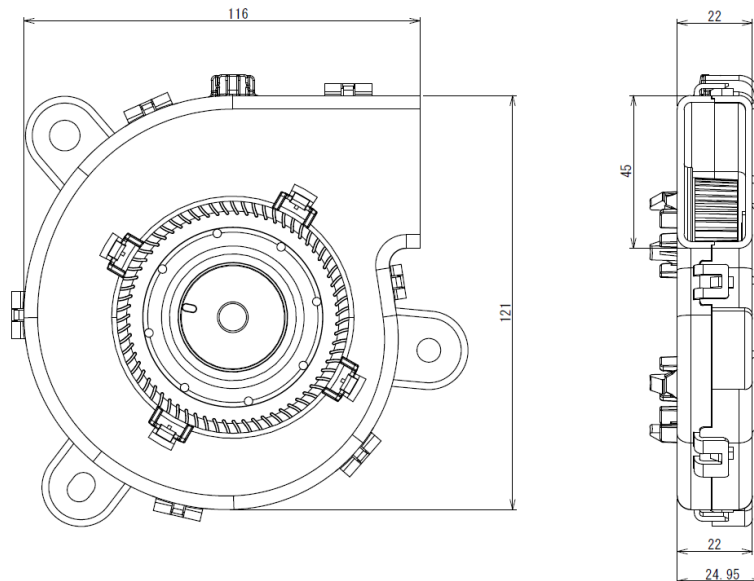

### ■ Japan (Headquarters)

## Shinano Kenshi Co., Ltd.

1078, Kami-maruko, Ueda City, Nagano 386-0498  
Japan  
jp.aspina-group.com

### ■ USA

## ASPINA Inc.

18952 MacArthur Boulevard, Suite 230, Irvine, California 92612  
U.S.A.  
us.aspina-group.com

### ■ Europe

## ASPINA GmbH

Köln Str. 12, 65760 Eschborn  
Germany  
eu.aspina-group.com